



= 1 sq ft

PLAN VIEW

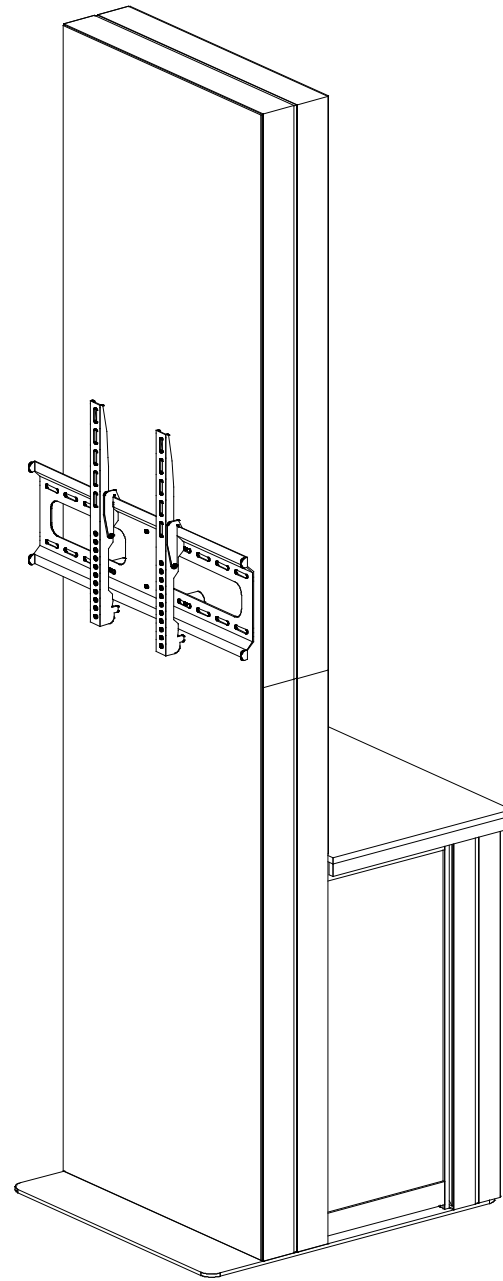

FRONT VIEW

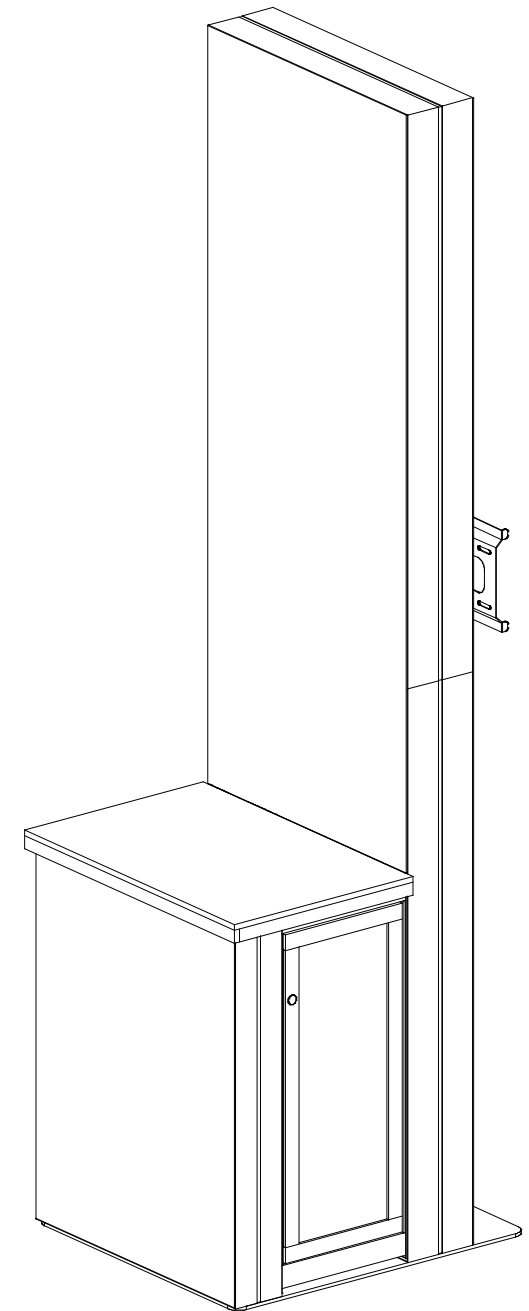

BACK VIEW

SETUP INSTRUCTIONS

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

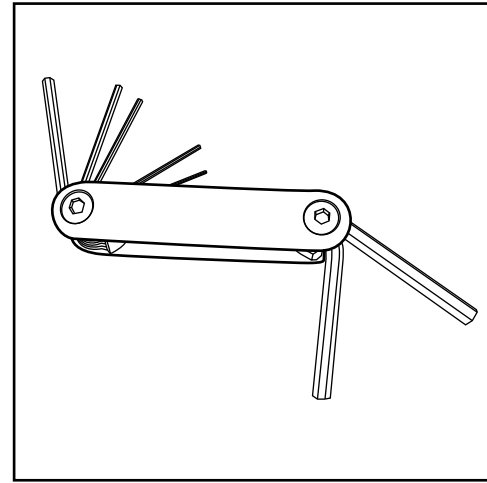


Hex Tool - Essential for Assembly

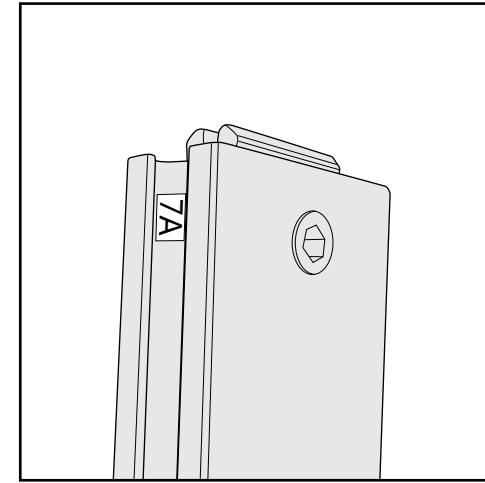


Part Identification - Numbering

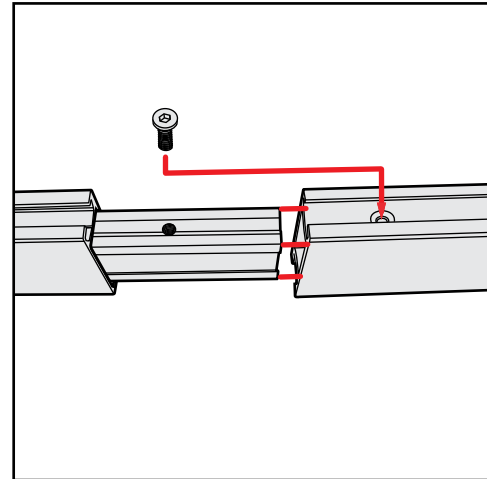


Spline Connection

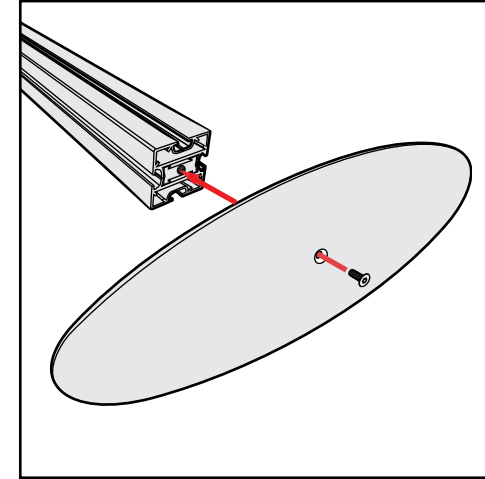

Base Plate & Extrusion Connection

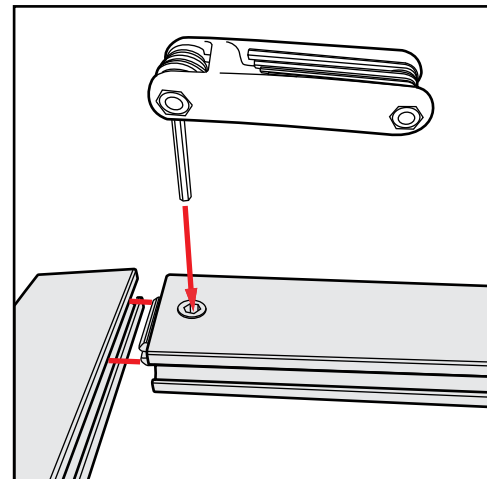

Extrusion & Lock Connection

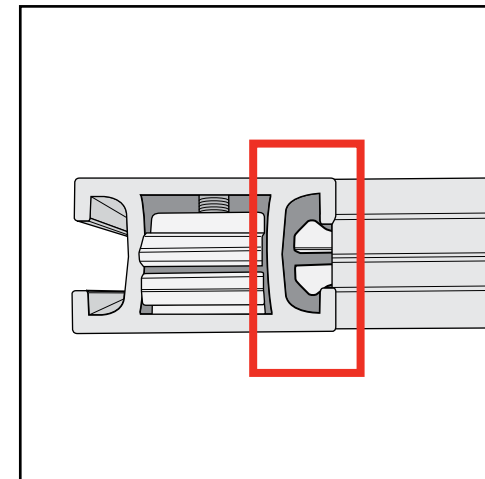


Engaged Lock



WARNING



DO NOT USE POWER TOOLS



LADDERS OR LIFTS
MAY BE REQUIRED



ALL CONNECTIONS MUST
BE TIGHTLY SECURED




Corner Bracket Installation

- 1) Slide TWO-PIECE **TS RV 2** L-bracket into Interior Center Slot of extrusion so that two set screws are inside groove. Tighten two set screws to secure.
- 2) Slide two **A1** L-Brackets into outer interior grooves of upper and lower horizontals. Tighten set screws to secure.
- 3) Slide vertical extrusion over exposed ends of brackets in lower horizontal. Tighten set screws to secure.
- 4) Slide exposed ends of installed brackets of upper horizontal into open ends of verticals. Tighten set screws to secure.

Disassembly

- 1) Loosen set screws on brackets and slide extrusions off of brackets.


Corner Connection

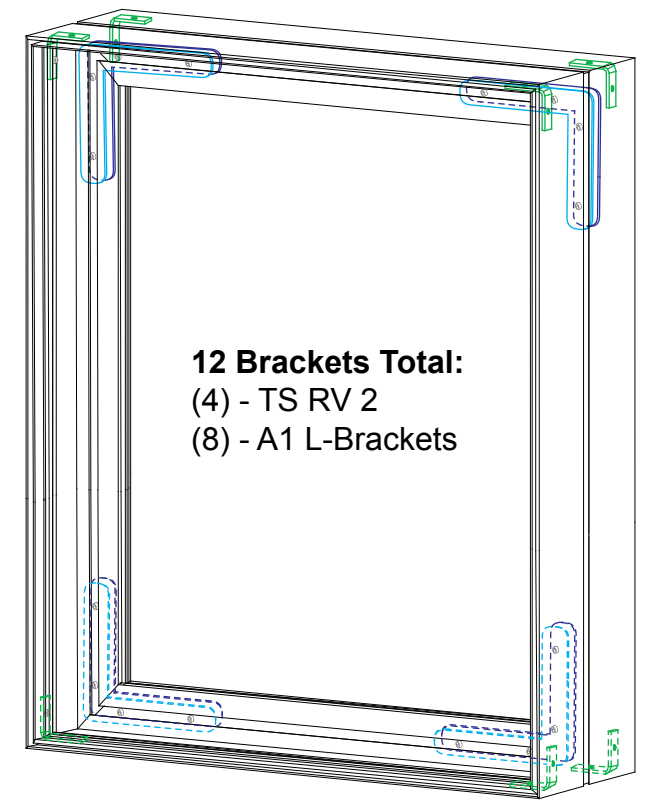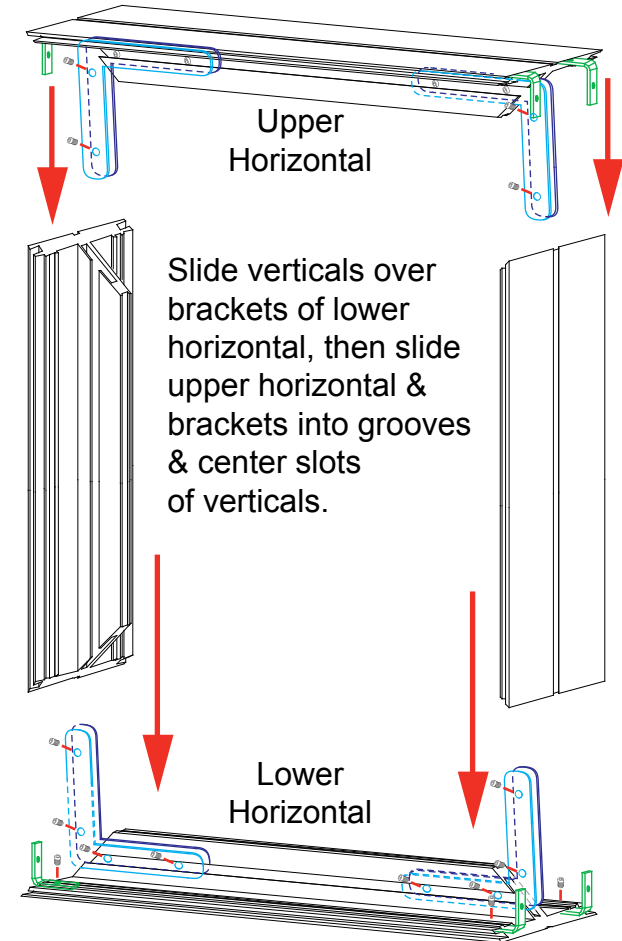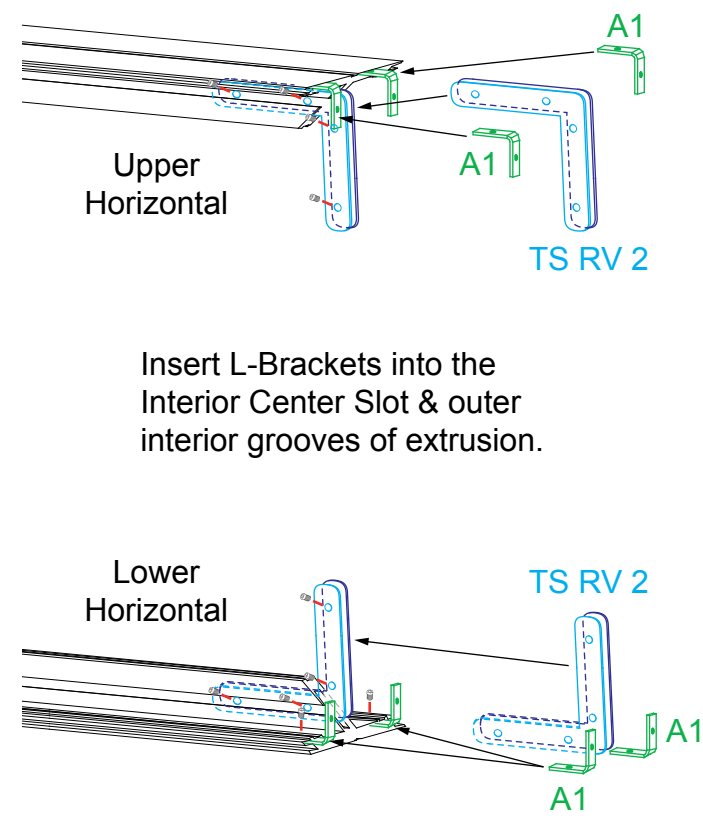


Completed Assembly

Straight Bracket Installation

- 1) Slide TWO-PIECE **TS RV 4** straight bracket into Interior Center Slot of extrusion, so that two of the set screws are inside groove. Tighten two set screws to secure.
- 2) Slide two **V4 Connectors** into outer interior grooves of extrusion, so that one set screw is inside groove. Tighten set screw.
- 3) Slide connecting extrusion over exposed ends of bracket & connectors. Tighten all remaining set screws to secure extrusions.

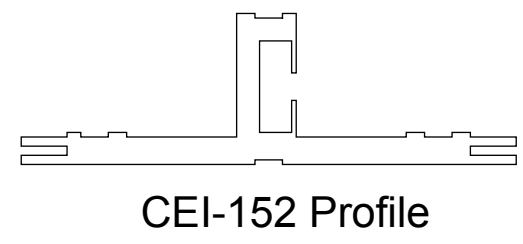

Straight Connection

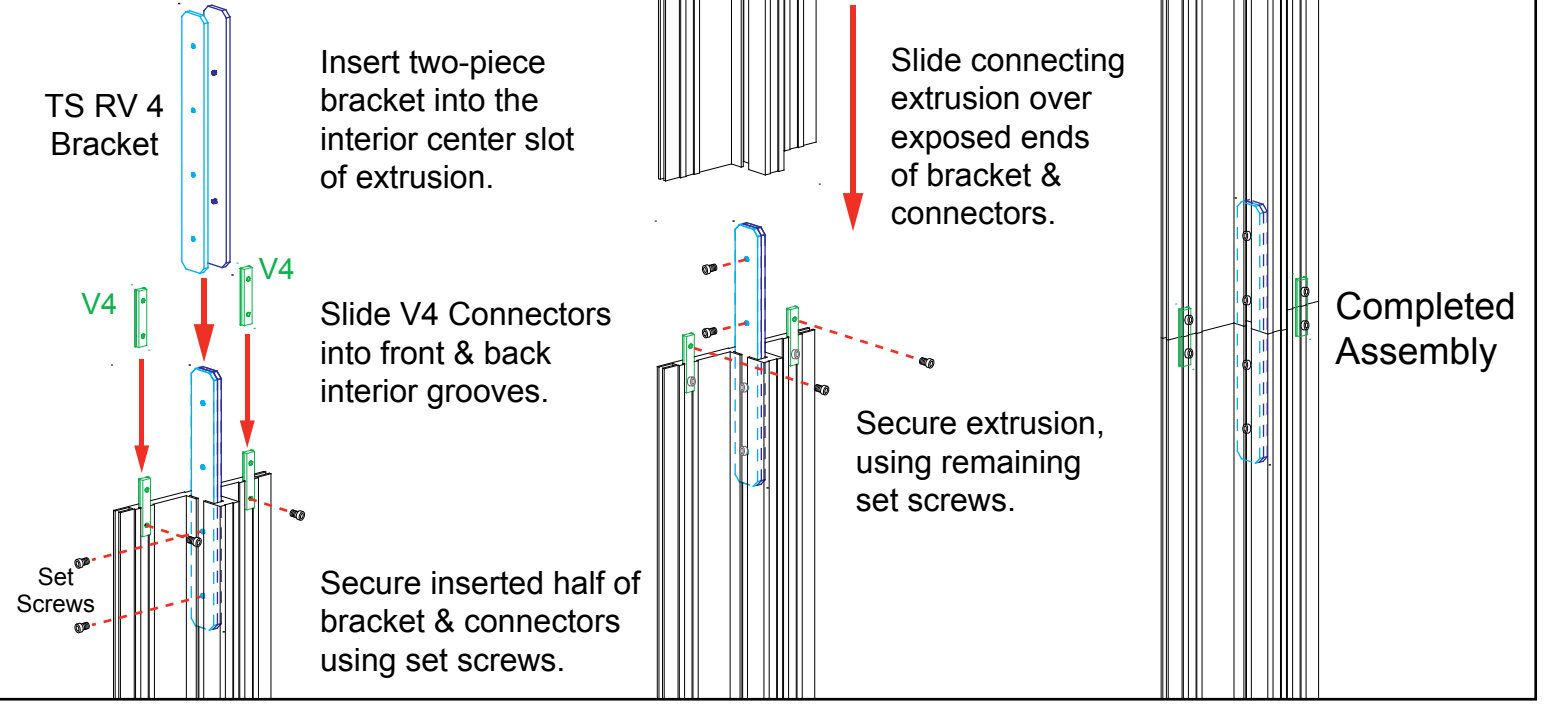


Corner Bracket Assembly

- 1) Slide TWO-PIECE **TS RV 2** L-bracket into Interior Center Slot of extrusion so that two set screws are inside groove. Tighten two set screws to secure.
- 2) Slide one **A1** L-Bracket into outer interior grooves of upper and lower horizontals. Tighten set screws to secure.
- 3) Slide vertical extrusion over exposed ends of brackets in lower horizontal. Tighten set screws to secure.
- 4) Slide exposed ends of installed brackets of upper horizontal into open ends of verticals. Tighten set screws to secure.

Disassembly

- 1) Loosen set screws on brackets and slide extrusions off of brackets.

Corner Connection

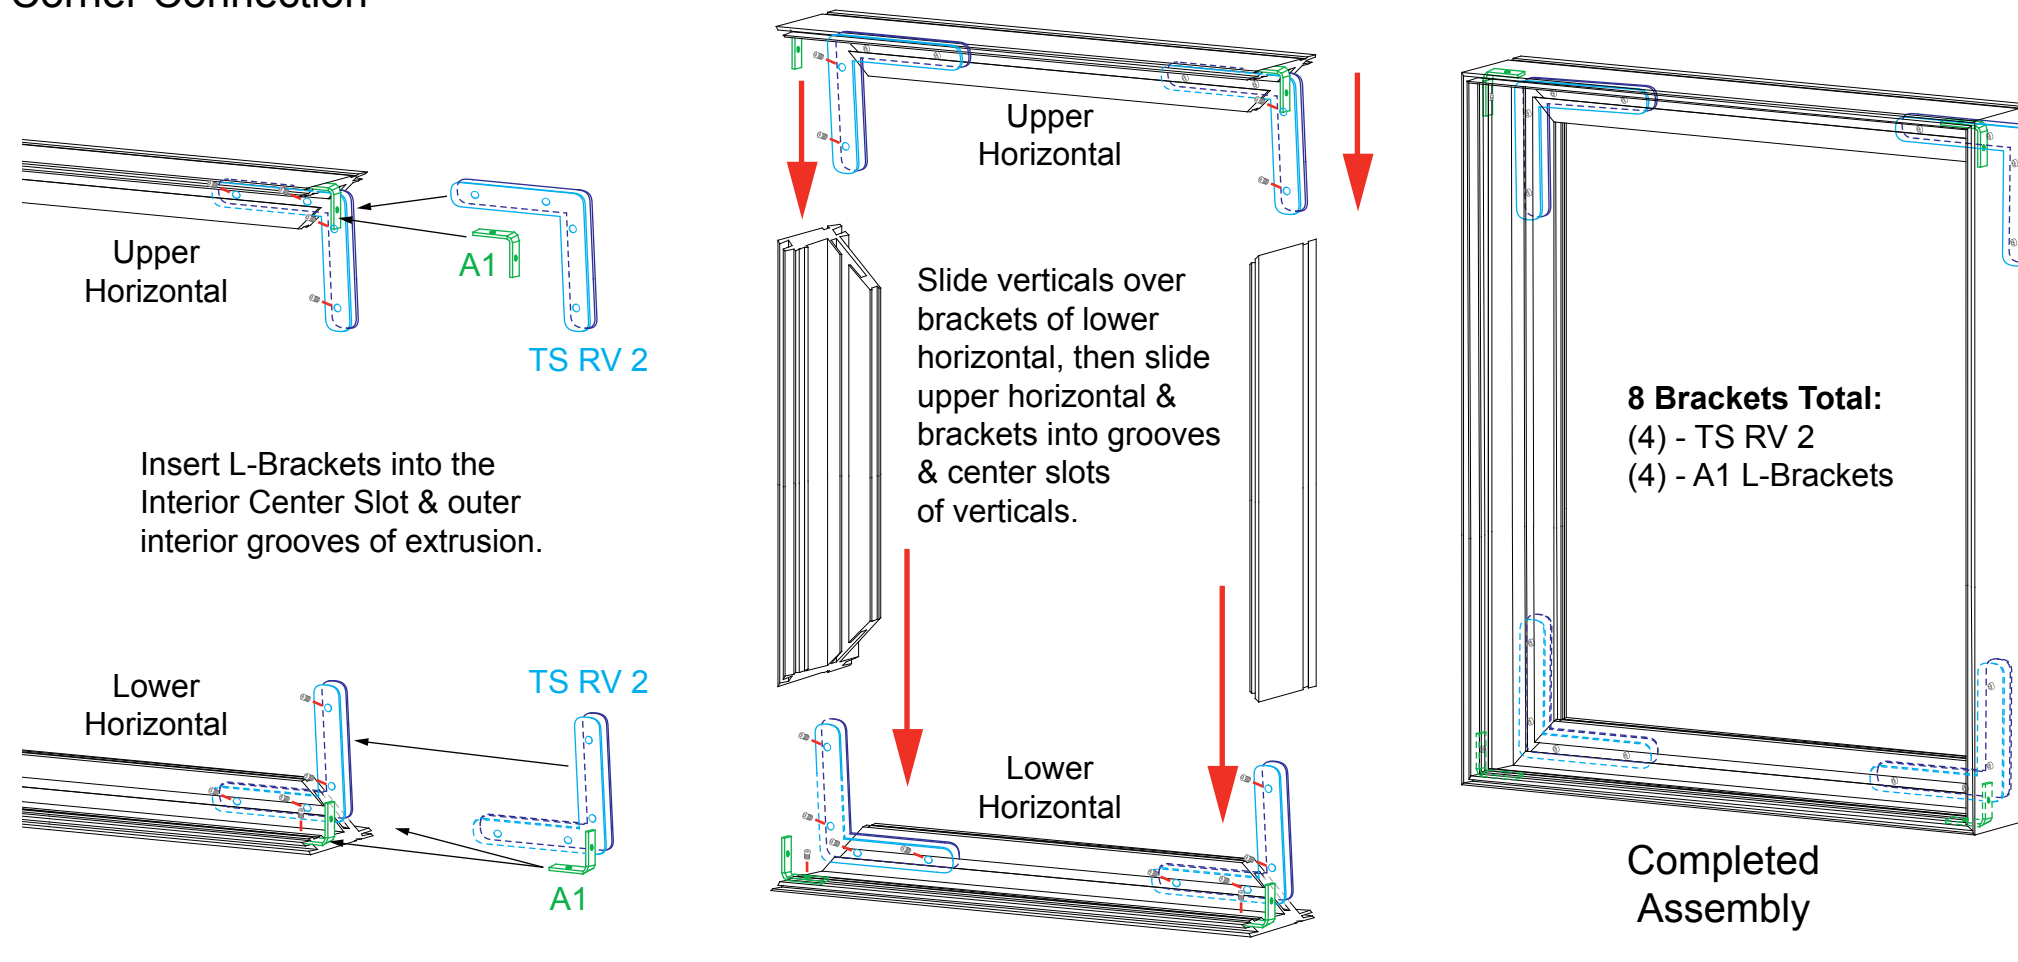



Straight Bracket Assembly

- 1) Slide TWO-PIECE **TS RV 4** straight bracket into Interior Center Slot of extrusion, so that two of the set screws are inside groove. Tighten two set screws to secure.
- 2) Slide one **V4 Connector** into outer interior groove of extrusion, so that one set screw is inside groove. Tighten set screw.
- 3) Slide connecting extrusion over exposed ends of bracket & connector. Tighten all remaining set screws to secure extrusions.




Straight Connection

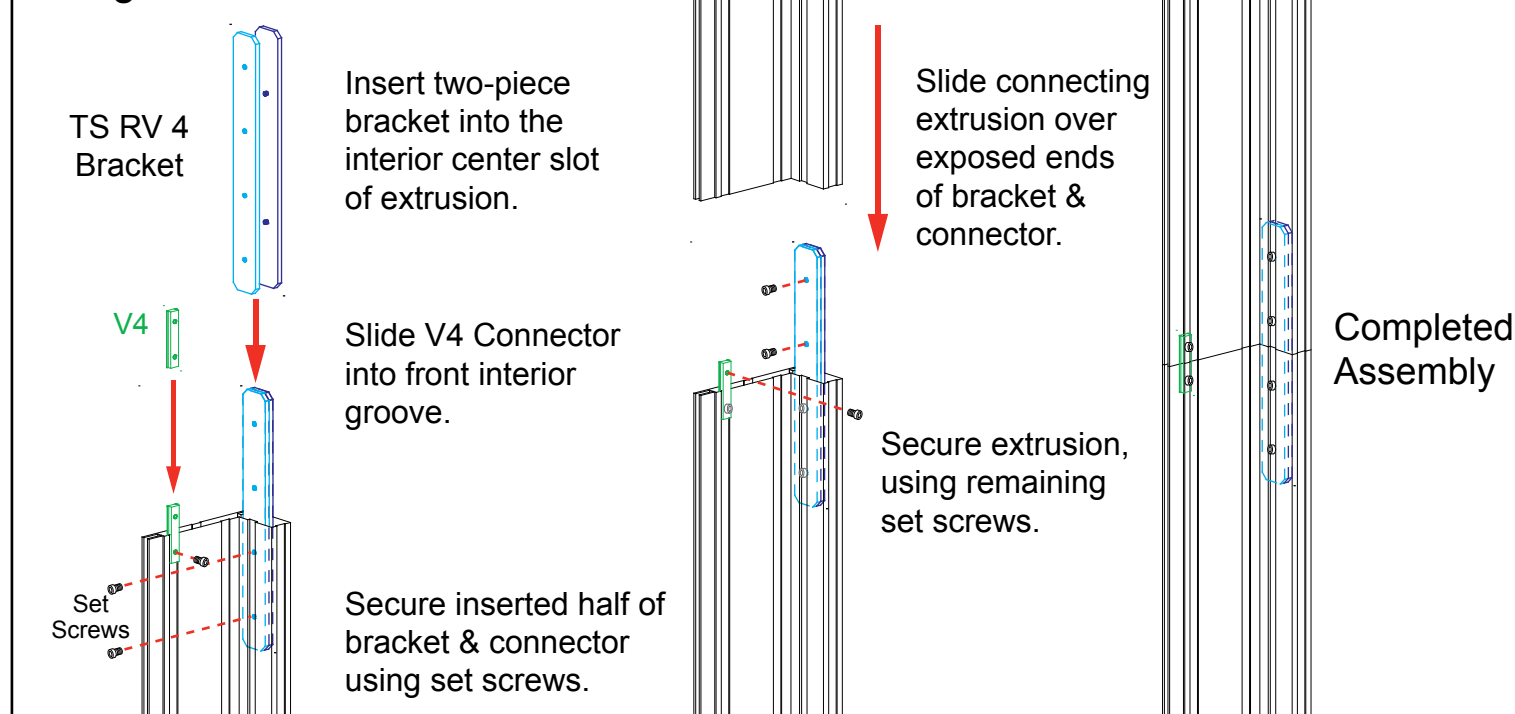

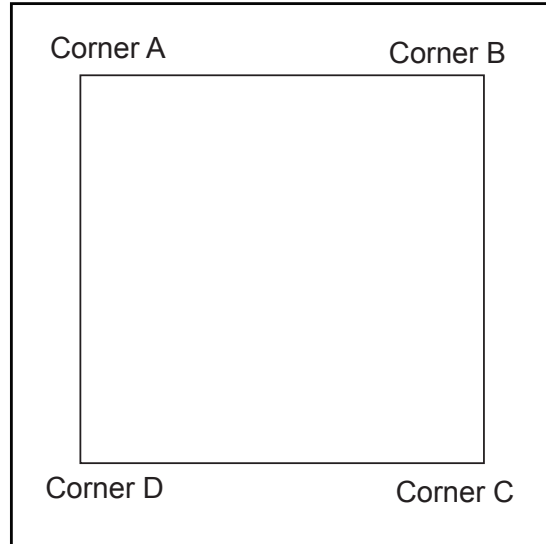

It is important to first insert graphic into each alternate corner then to the sides of the frame. If this is not done, graphic will not fit into the frame correctly.

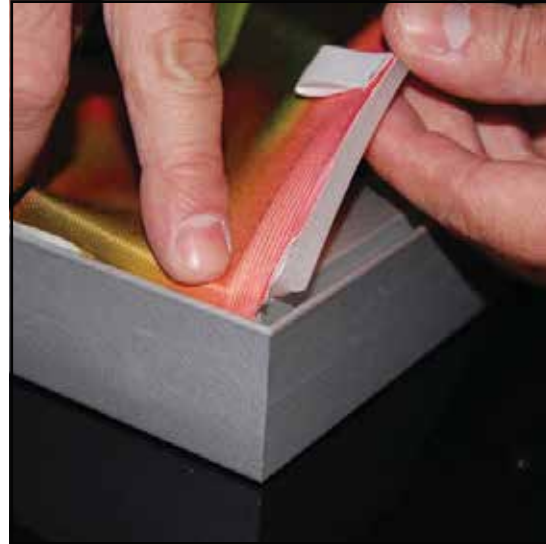

Step 1
Insert corner A. Turn edge of graphic so silicon welt is perpendicular to face of graphic. Insert narrow side of welt with fabric to outside into the channel. Repeat for other side of this corner.




Step 2
Repeat Step 1 for opposite corner C, then insert corner B, followed by corner D, to complete the installation of the corners.



Step 3
Once all corners are inserted, press one silicon edge into channel from corners and work toward the center. Make sure welt is fully inserted into channel. Continue until all sides are done. Smooth out edges of graphic.

Graphic Removal

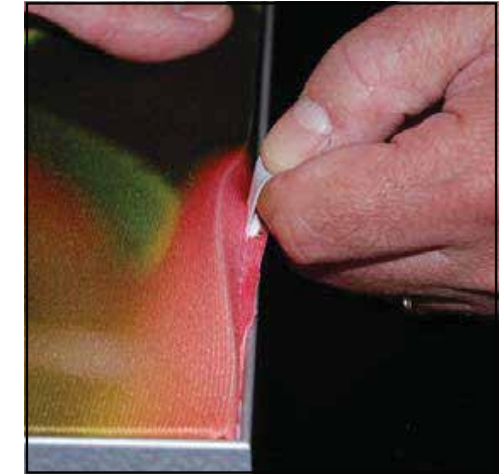

To remove the graphic from the frame, locate the fabric pull tab. Gently pull up on the tab to remove the fabric.




Item	Qty.	Description
1	1	30"h CEI110 Vertical Extrusion w/ S10
2	1	30"h CEI110 Vertical Extrusion w/ S10 & Door Stopper
3	1	24"w CEI110 Horizontal Extrusion
4	1	24"w CEI110 Horizontal Extrusion

Steps:

Refer to the CEI110 Frame Assembly general information page.


- 1) Assemble verticals [1,2] between horizontal [3,4], inserting **Infill**.
See [CEI-110 Corner Connection](#) detail.

Assemble frame flat on ground.

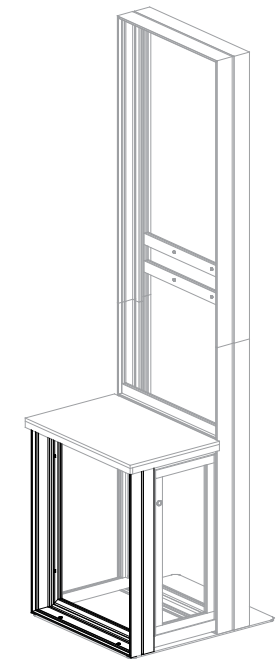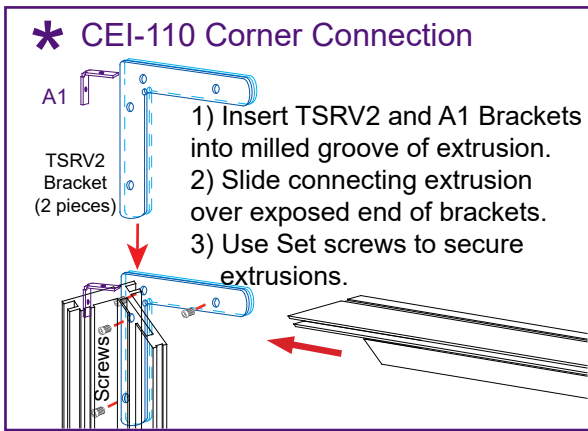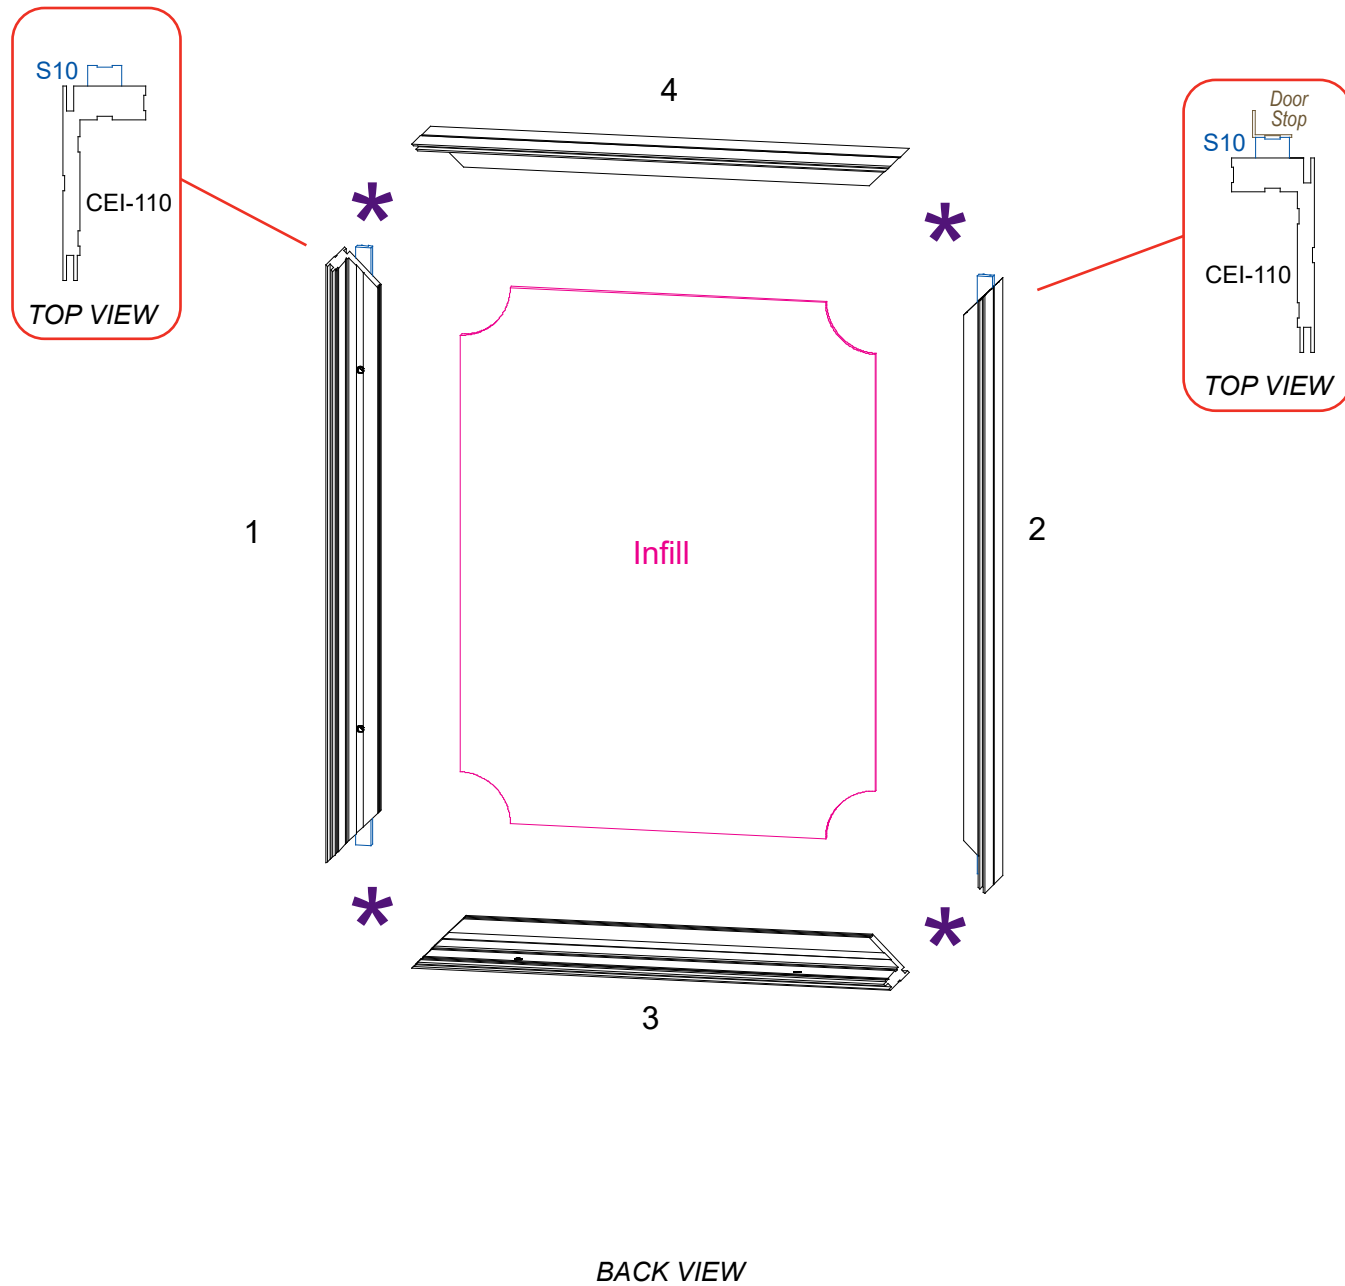

BACK VIEW

Section Being Assembled is Highlighted in BLACK

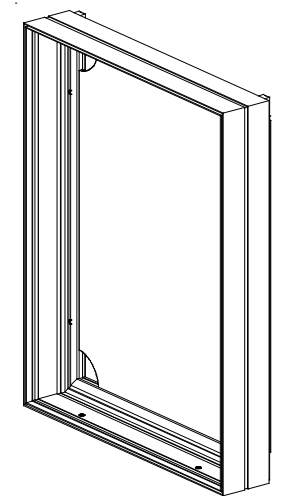

When assembled

Item	Qty.	Description
5	1	45"h CEI152 Vertical Extrusion
6	1	45"h CEI152 Vertical Extrusion
7	1	45"h CEI152 Vertical Extrusion
8	1	45"h CEI152 Vertical Extrusion
9	1	24"w CEI152 Horizontal Extrusion
10	1	24"w CEI152 Horizontal Extrusion
11	1	23.252"w TSP46 Horizontal Extrusion
12	1	23.252"w Z45 Horizontal Extrusion
13	1	23.252"w Z45 Horizontal Extrusion

- Steps:**
- Refer to the CEI152 Frame Assembly general information page.
- 1) Assemble verticals [5-6], [7-8] together. See **CEI-152 Straight Connection** detail.
 - 2) Connect vertical assemblies [5/6], [7/8] between horizontals [9,10] as shown. See **CEI-152 Corner Connection** and **CEI-152 Tool-Less Corner Connection** details.
 - 3) Attach horizontal [11] between verticals [5,7]. See **TSP46 Attachment** detail.
 - 4) Connect horizontals [12,13] between verticals [6,7]. See **Z45 Attachment** detail.

Assemble frame flat on ground.

*** CEI-152 Straight Connection**

1. Insert TSRV4 Bracket & V4 Connectors into grooves of extrusion as shown.
2. Slide Connecting extrusion over exposed ends of bracket & connectors.

3. Use Set Screws to secure extrusions.

*** Z45 Attachment**


Attach Z45 horizontals to *outer* groove of CEI-152 vertical.

*** CEI-152 Corner Connection**

- 1) Insert TSRV2 and A1 Brackets into milled groove of extrusion.
- 2) Slide connecting extrusion over exposed end of brackets.
- 3) Use Set screws to secure extrusions.


*** CEI152 Tool-less Corner Connection**

1. Slide extrusion onto corner connectors.
2. Tighten all knobs to secure connection.

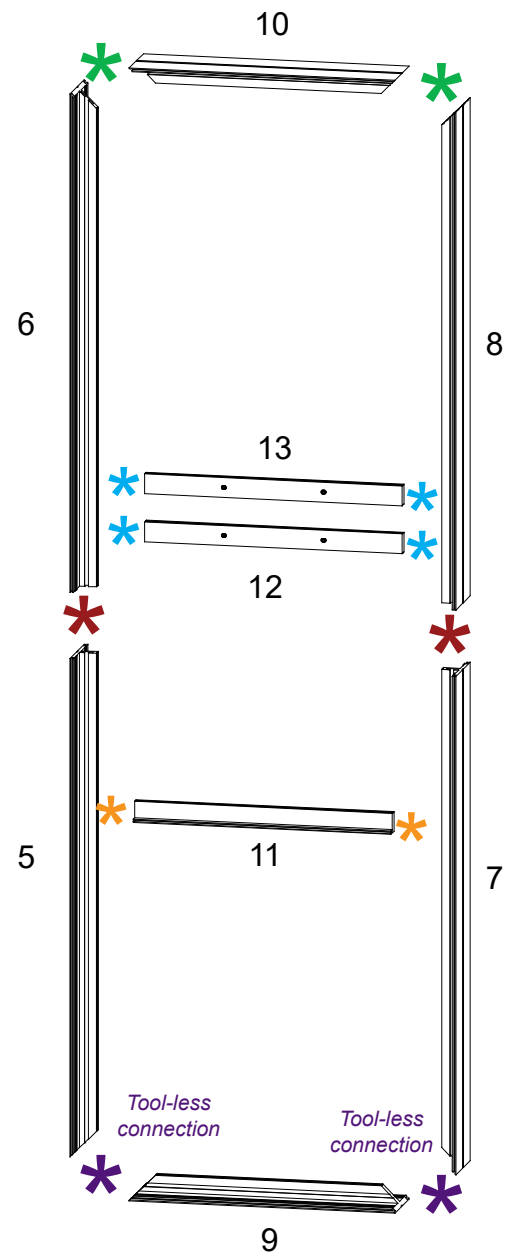


*** TSP46 Attachment**

Attach TSP46 horizontal to inner groove of CEI-152 vertical.

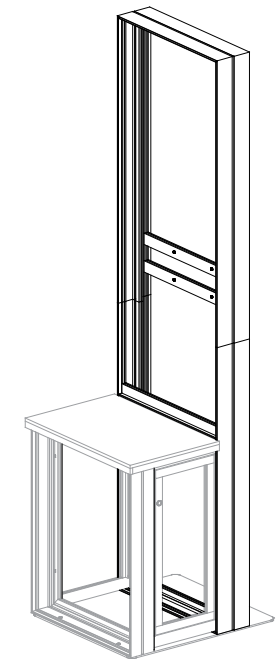

BACK VIEW

Section Being Assembled is Highlighted in BLACK




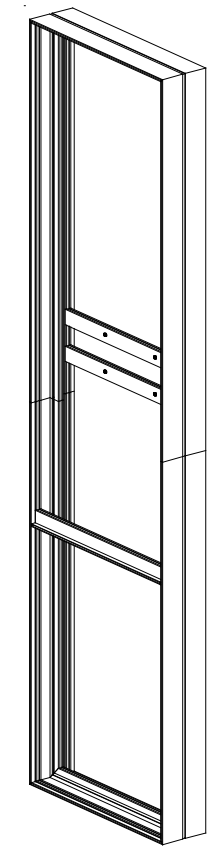


When assembled



BACK VIEW

Item	Qty.	Description
14	1	26.403”h GS220 Vertical Extrusion
15	1	13.886”w Z45 Horizontal Extrusion
16	1	13.886”w Z45 Horizontal Extrusion
17	1	26.403”h GS220 Vertical Extrusion w/ Door Hinges
18	1	13.886”w Z45 Horizontal Extrusion
19	1	13.886”w Z45 Horizontal Extrusion

- Steps:**
- 1) Attach vertical [14] between horizontals [15,16].
 - 2) Insert **Infill** between horizontals [15,16], then connect to S10 on vertical [1].
 - 3) Attach vertical [17] between horizontals [18,19].
 - 4) Connect Door to hinges on vertical [17]. See **Door Attachment** detail. Then attach horizontals [18,10] to S10 on vertical [2].
 - 5) Slide **Infill** between verticals [14,17].
 - 6) Connect horizontals [15,16] to vertical [5], and horizontals [18,19] to vertical [7].

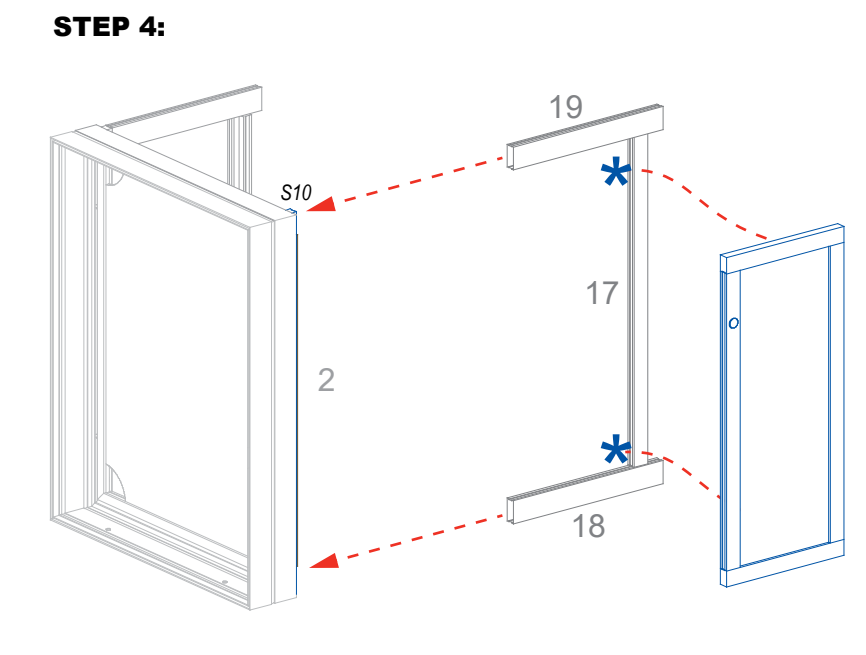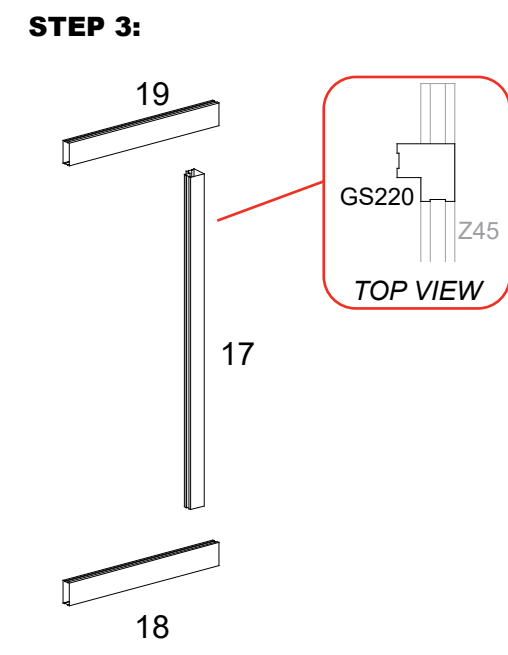
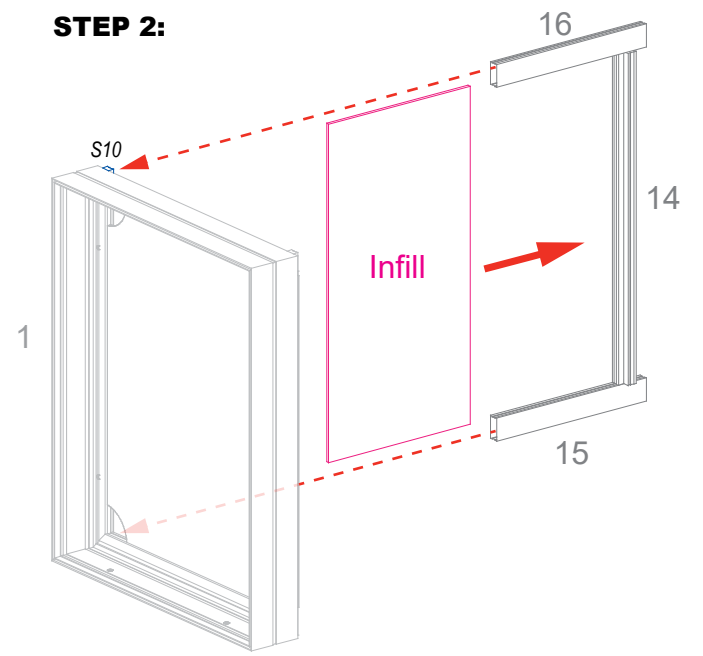
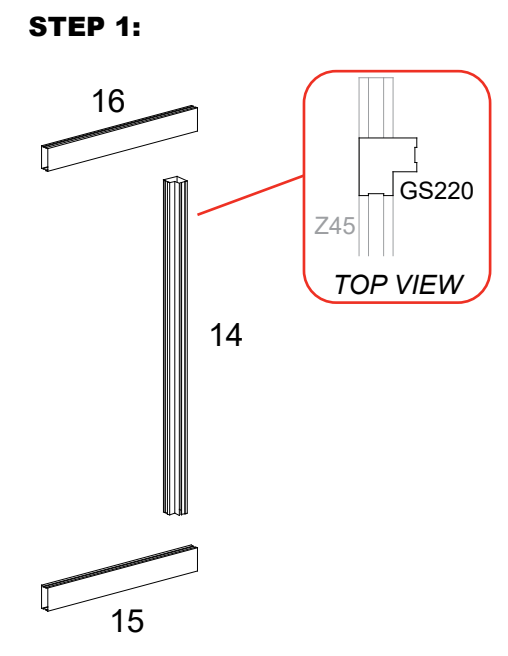


STEPS 5 & 6:

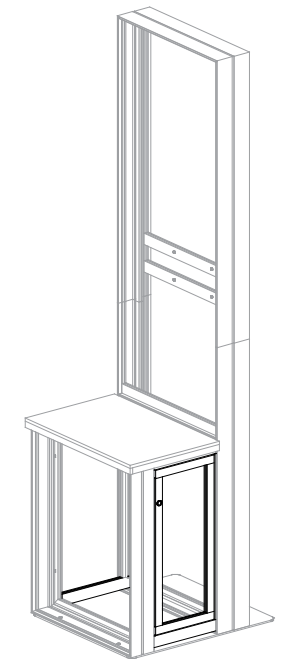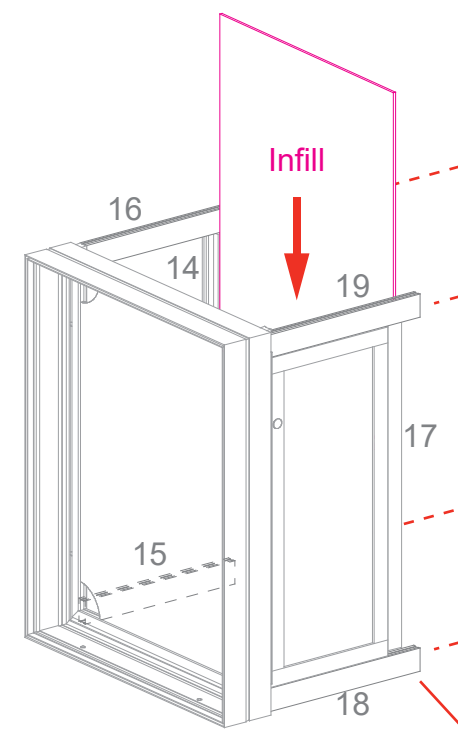




BACK VIEW

Section Being Assembled is Highlighted in BLACK

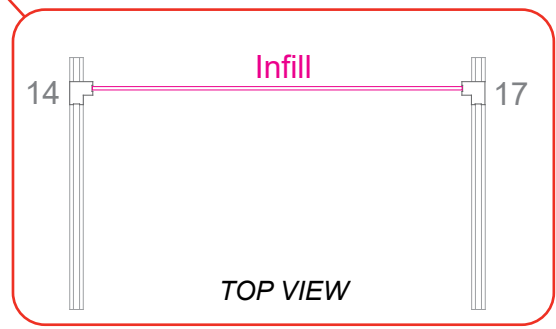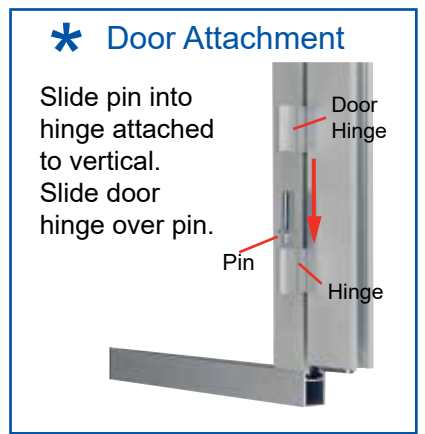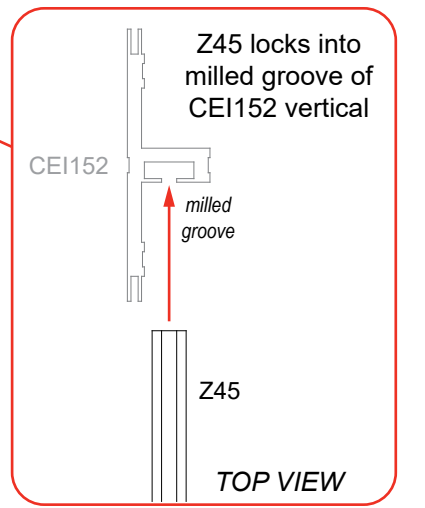


Item	Qty.	Description
20	1	24"w x 27"d Base Plate

- Steps:
- 1) Attach Base Plate [20] to bottom of kiosk horizontals [3] & [9], using bolts & wing nuts.
 - 2) Connect power cords to Supernova lights in front & back lightboxes, as shown.

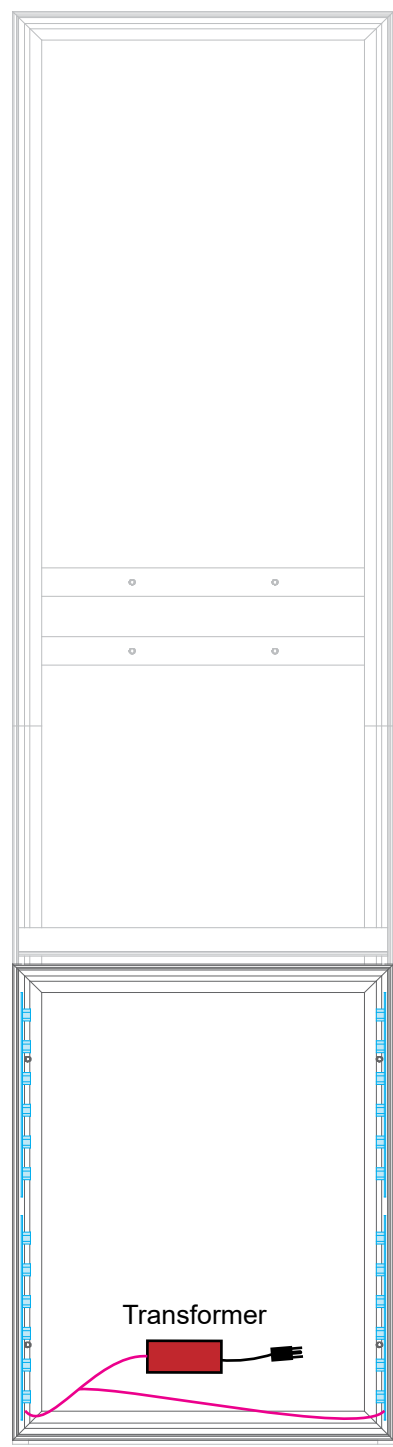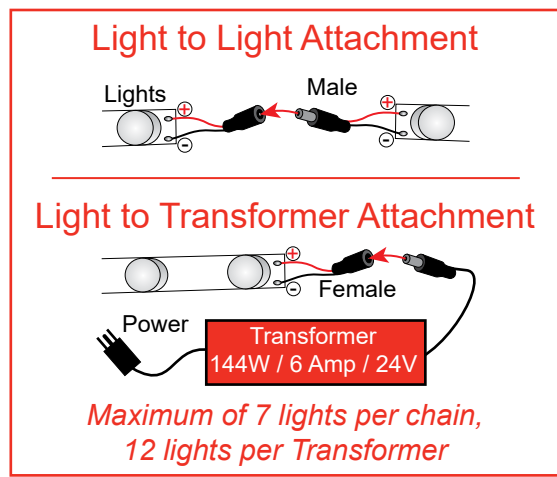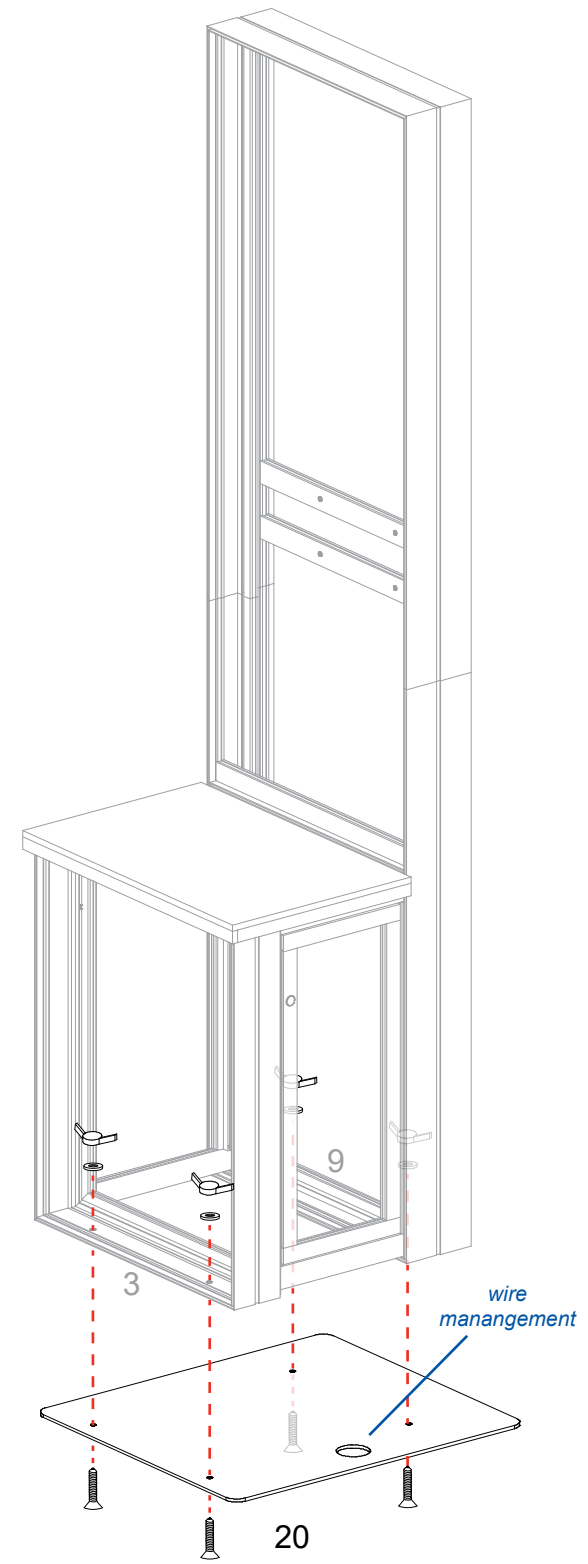






BACK
ELEVATION VIEW

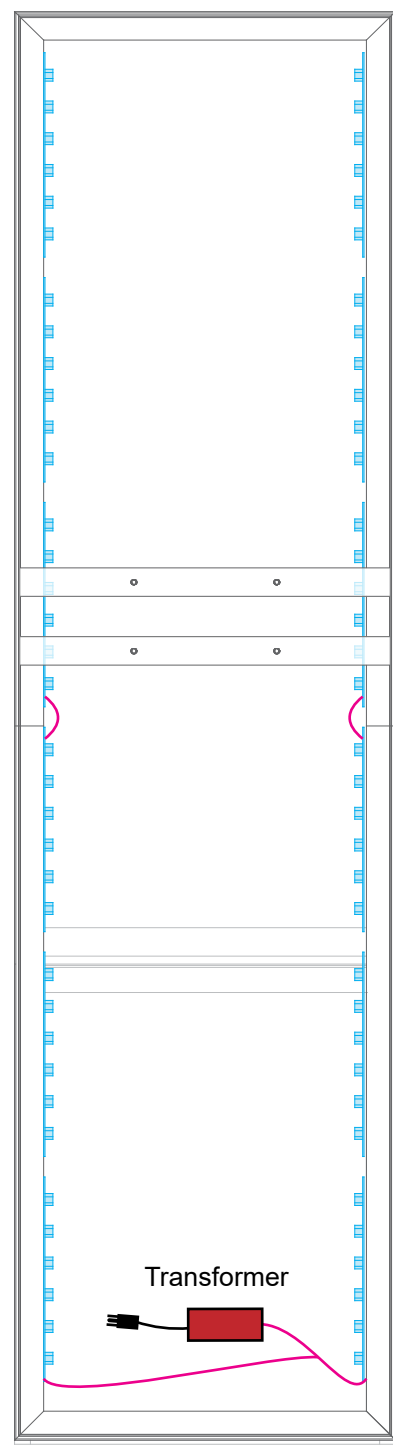

FRONT
ELEVATION VIEW


Item	Qty.	Description
--	1	25.192"w x 16.594"d Counter Top

- Steps:
- Refer to the SEG Installation general information page.
- 1) Apply SEG graphic to back lightbox and front face of front lightbox.
 - 2) Install Monitor Mount to horizontals [12,13] as shown. See **Monitor Mount Attachment** detail.
 - 3) Apply SEG graphic to back face of front lightbox.
 - 4) Attach Counter Top to kiosk assembly. See **Counter Top Attachment** detail.

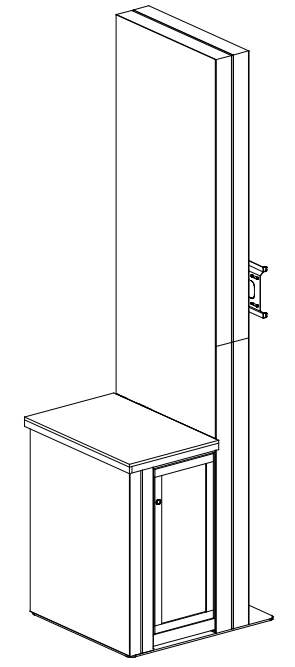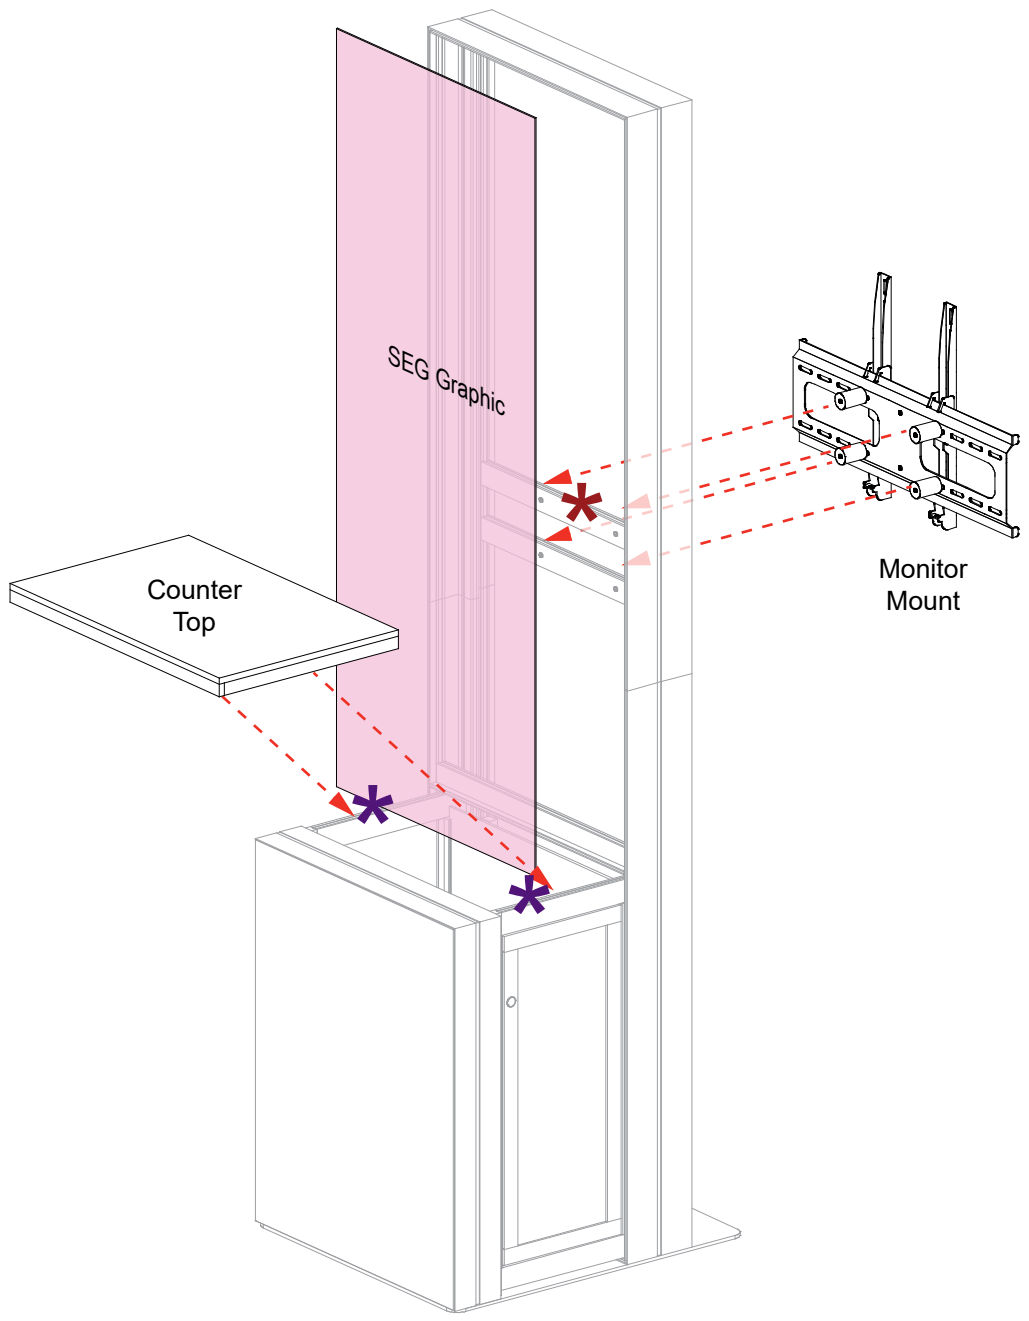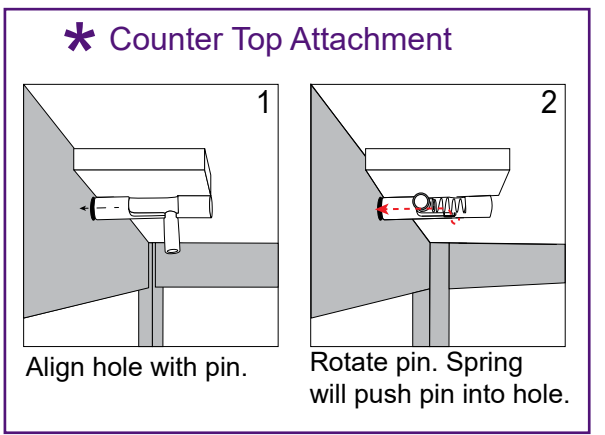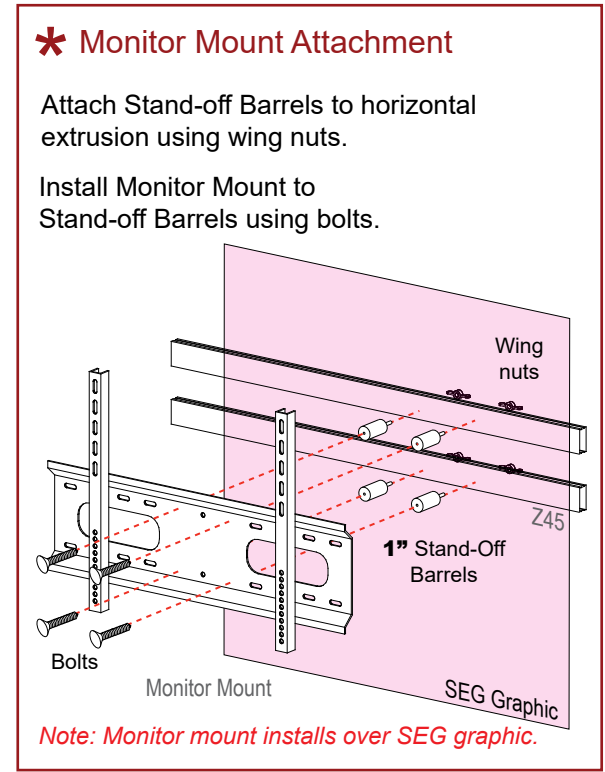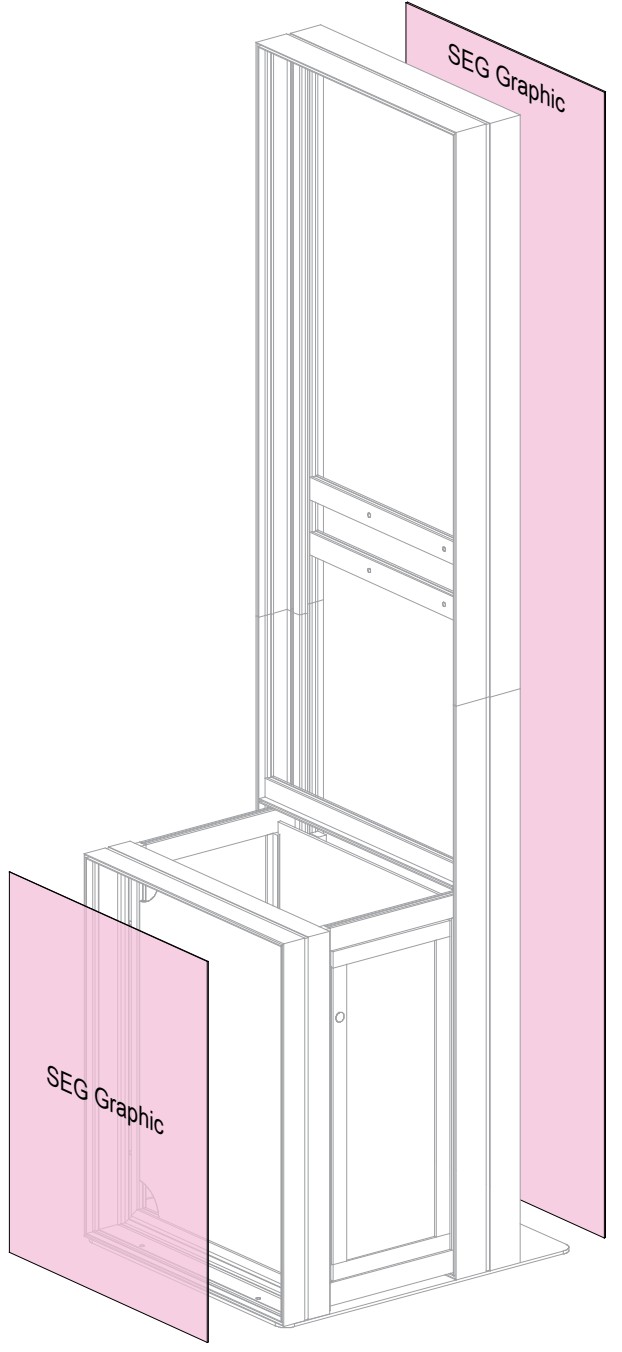

BACK VIEW

Completed Assembly

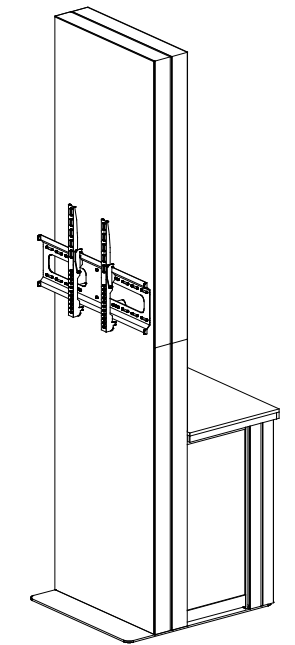

FRONT VIEW